




APC INFINITY

WiFi Module for Proteous Range

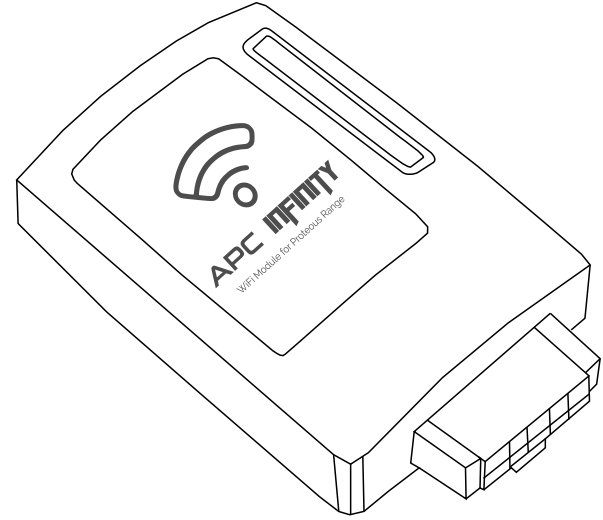

Compatible With

Proteous

P450
P500
P1000



Logico 24
CONTROL UNIT

The Most Advanced WiFi Control Smart Gate Automation Management Module



APC INFINITY

WiFi Module for Proteous Range

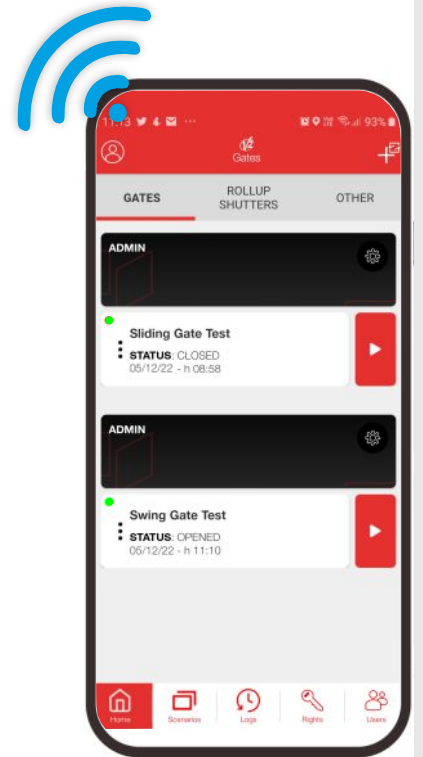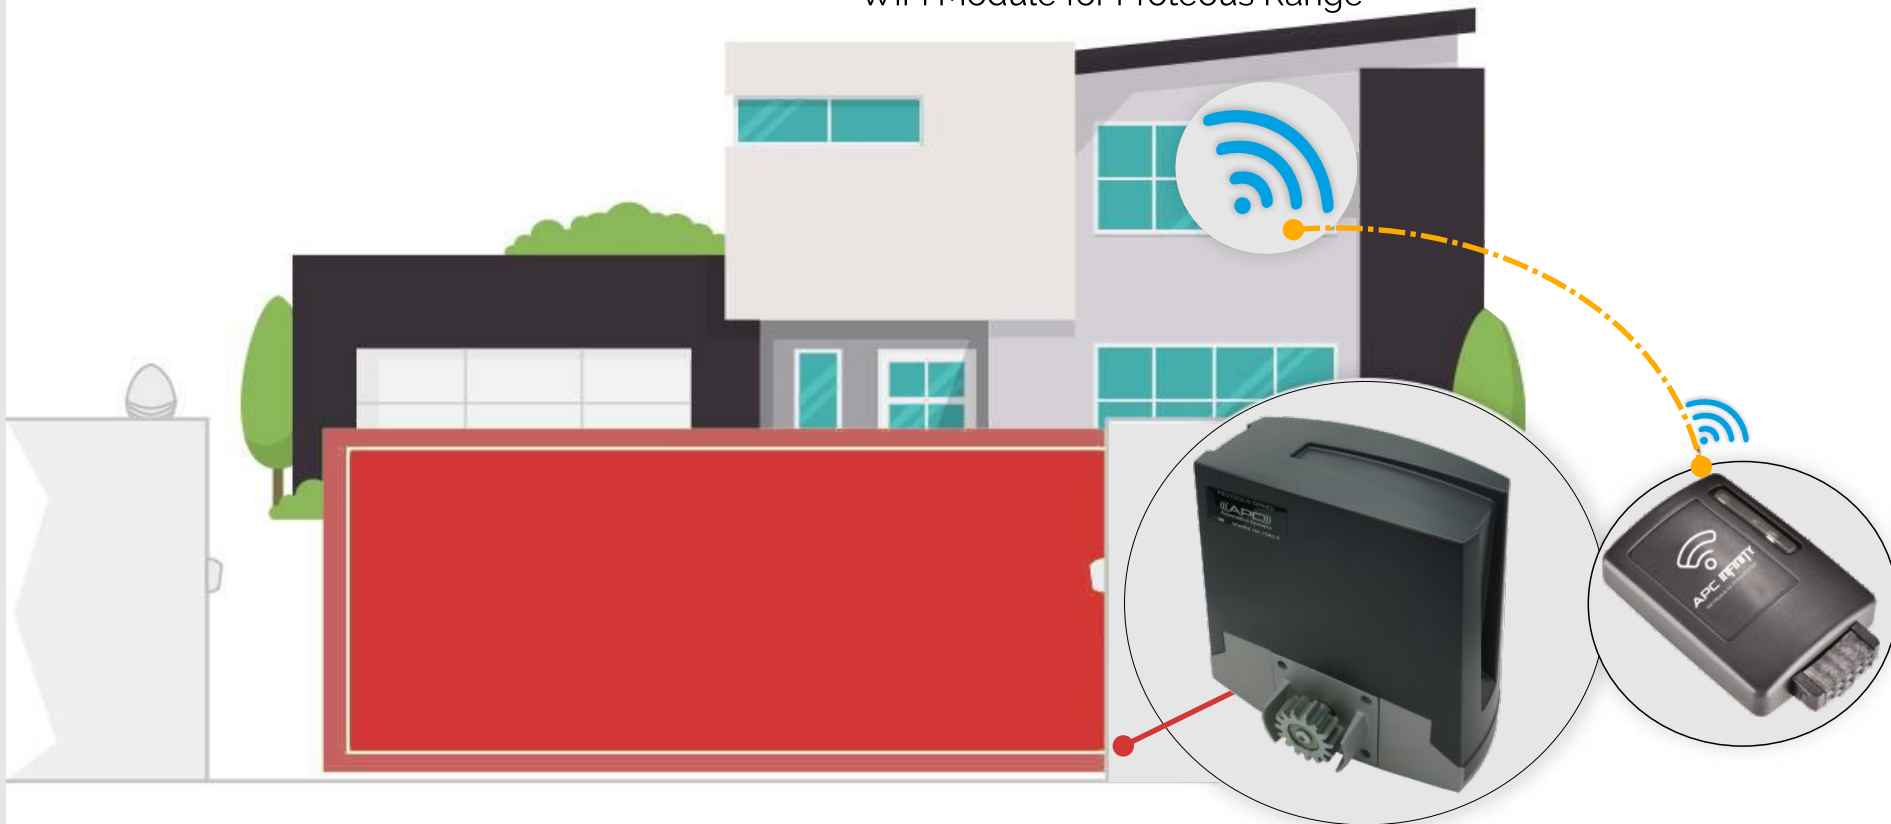



APC INFINITY

WiFi Module for Proteous Range

V2 GO APP




Download V2 GO APP from App Store or Google Play Remote gate automation management with Smartphone

INSTALLATION




1. Disconnect the power supply to the control unit
2. Insert the module into the ADI port of the control unit
3. At the first installation, make sure that the module is in access point mode (RED LED ON STEADY)
4. Then proceed to enroll the control panel to the server following the instructions provided by the V2 GO APP (Page4)

NOTE: If the module is not in access point mode, reset the module using the reset procedure: press the reset button for 3 seconds, the LED must go out and light up again, remaining steady red

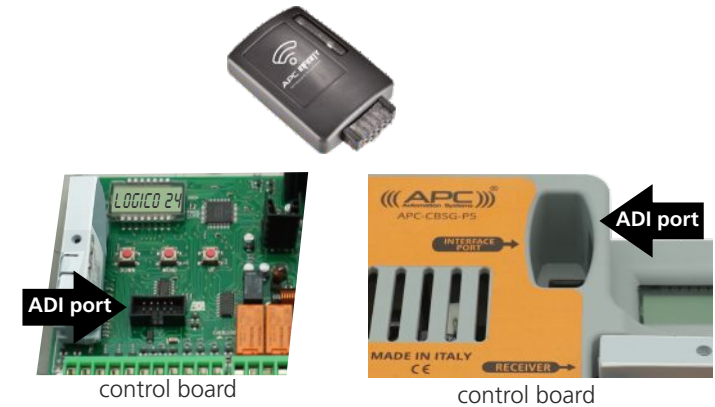

STATUS OF LED

- **FIXED RED:** The module is in Access Point mode, waiting for a connection
- **FLASHING RED:** mismatch between the serial of the control panel and the serial stored in the module. Perform the module reset procedure
- **FIXED BLUE:** STA mode, module connected to the server

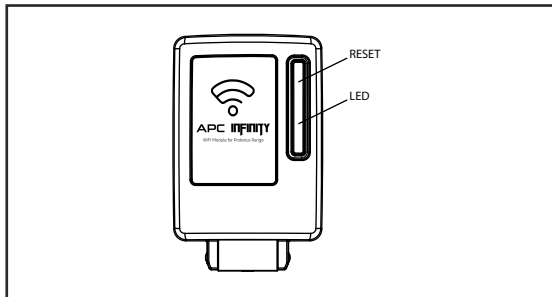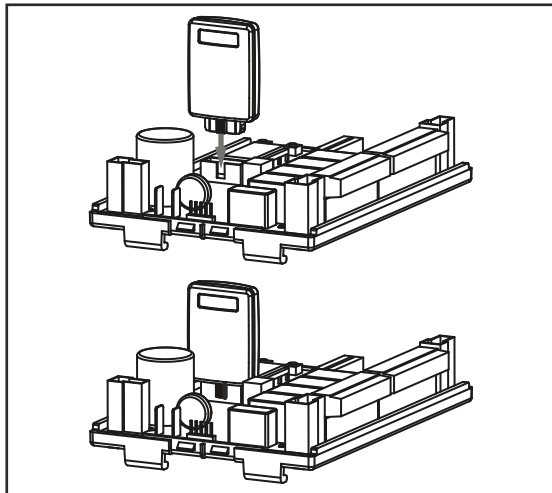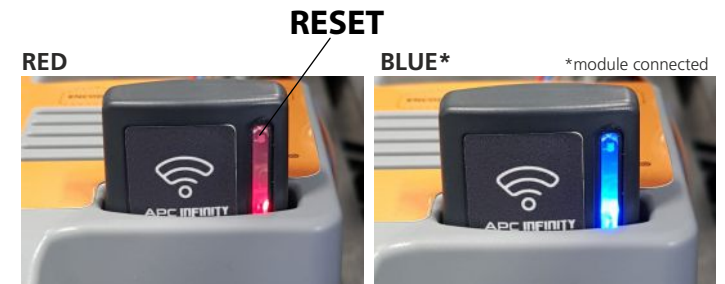




APC INFINITY

WiFi Module for Proteous Range

V2 GO APP



STEP-BY-STEP "V2 GO" SMART DEVICE APP SETTINGS FOR GATE AUTOMATION AS ADMIN

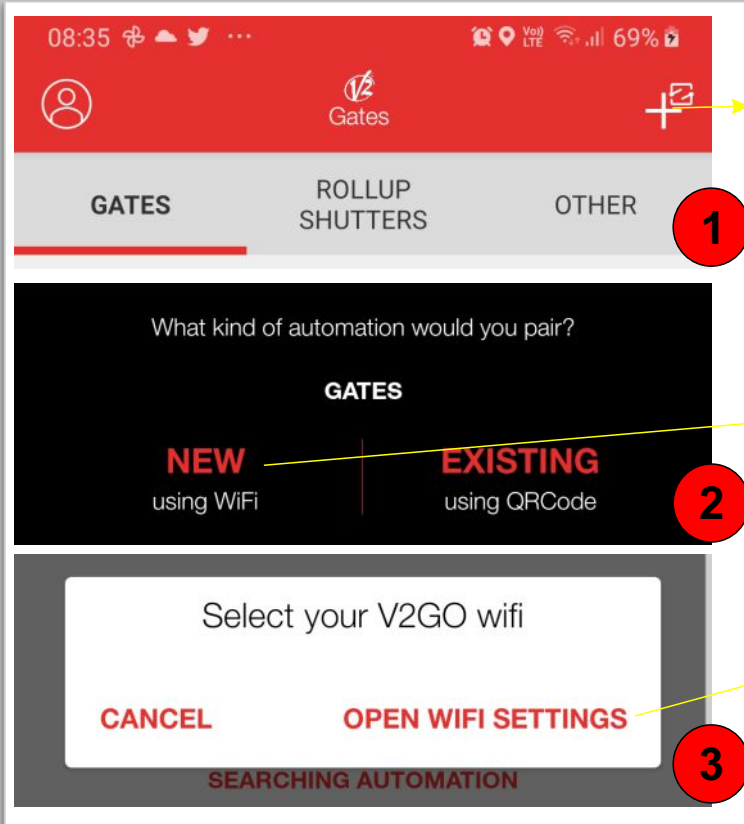

Add New

Select New

WIFI Settings

V2 GO APP ADMIN SET UP

1. Select **+** icon on right top site V2GO APP to add new Infinity Connection as Admin
2. Select **NEW** option on the screen
3. Select **OPEN WIFI SETTINGS** option on the screen
4. Select V2GOWIFI in the list
5. Setup Automation, Select the network to use for the automation (need to 2.4GHz)
6. Enter the WIFI Password and Click on the **CONTINUE**
7. Wait For Connecting to the WIFI Network
8. Without closing V2GO App, Open your WIFI Settings and connect your device to, the network to use for the automation
9. Return to the V2GO App, and continue the procedure



APC INFINITY

WiFi Module for Proteous Range


V2 GO APP



STEP-BY-STEP "V2 GO" SMART DEVICE APP SETTINGS FOR GATE AUTOMATION AS ADMIN



Select V2GOWIFI

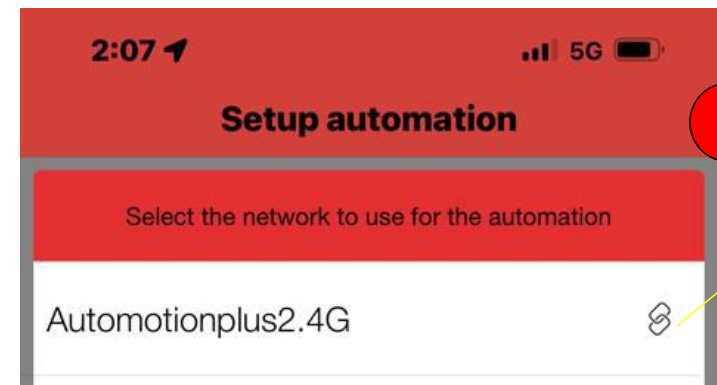

Select Your WIFI Network (2.4GHz)



Enter WIFI Password and Click to Continue Button




V2 GO APP



APC INFINITY

WiFi Module for Proteous Range

STEP-BY-STEP "V2 GO" SMART DEVICE APP SETTINGS FOR GATE AUTOMATION AS ADMIN

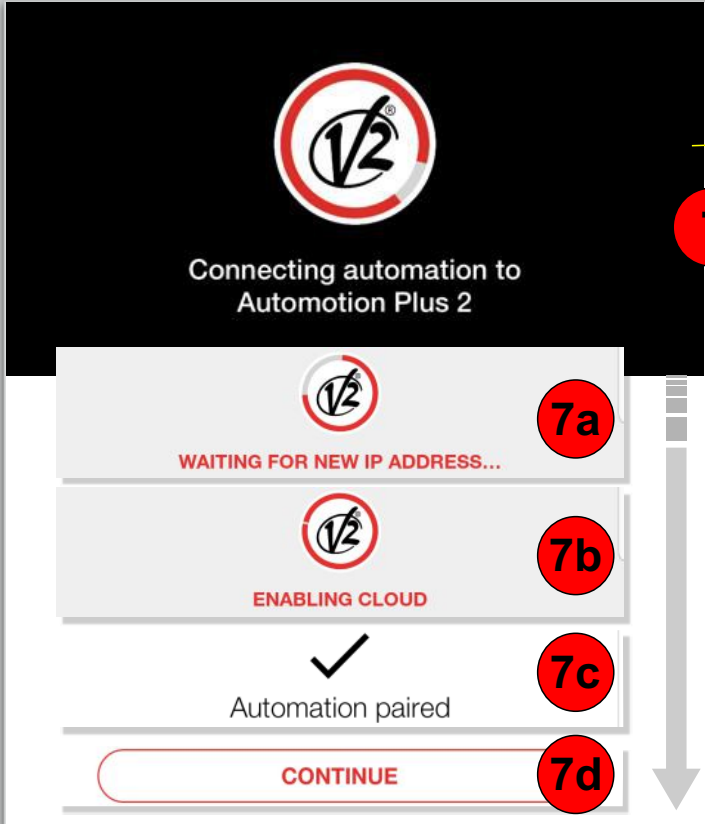


Wait For Connecting

1. Without closing the V2 app press the home button of your iPhone.

2. Click the settings button.



3. Select the wi-fi.

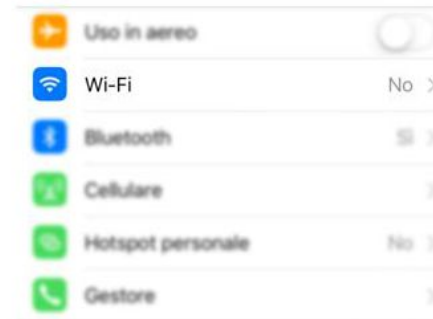

4. Select the WiFi: Automotion Plus 2

5. Return to the V2 app, and continue the procedure.

Without closing V2GO App, Open your WIFI Settings and **Select Your WIFI Network**



APC INFINITY

WiFi Module for Proteous Range

V2 GO APP



STEP-BY-STEP "V2 GO" SMART DEVICE APP SETTINGS FOR GATE AUTOMATION AS ADMIN



GATES **ROLLUP SHUTTERS** **OTHER**

ADMIN [Settings Gear Icon]

Swing Gate Test
• **STATUS:** OPENED
05/12/22 - h 11:10

9 Return to the V2GO App, and continue the procedure.



APC INFINITY

WiFi Module for Proteous Range

V2 GO APP



STEP-BY-STEP "V2 GO" APP SETTINGS FOR ADDING ADMIN / INVITEES SUB-USER VIA QR CODE

1 Select Icon

2 Select Icon

3a Select ADMIN

3b Select INVITEES

4 Select Automation

5 Scan the QR-CODE to Add Sub User






APC INFINITY

WiFi Module for Proteous Range

ENTER YOUR HOME WITHOUT LIFTING A FINGER

GEOLOCATION-BASED OPENING

Activate the GPS and the gate will open automatically as soon as it has detected the presence of your Smartphone at the set distance (250m / 500m/1000m options)

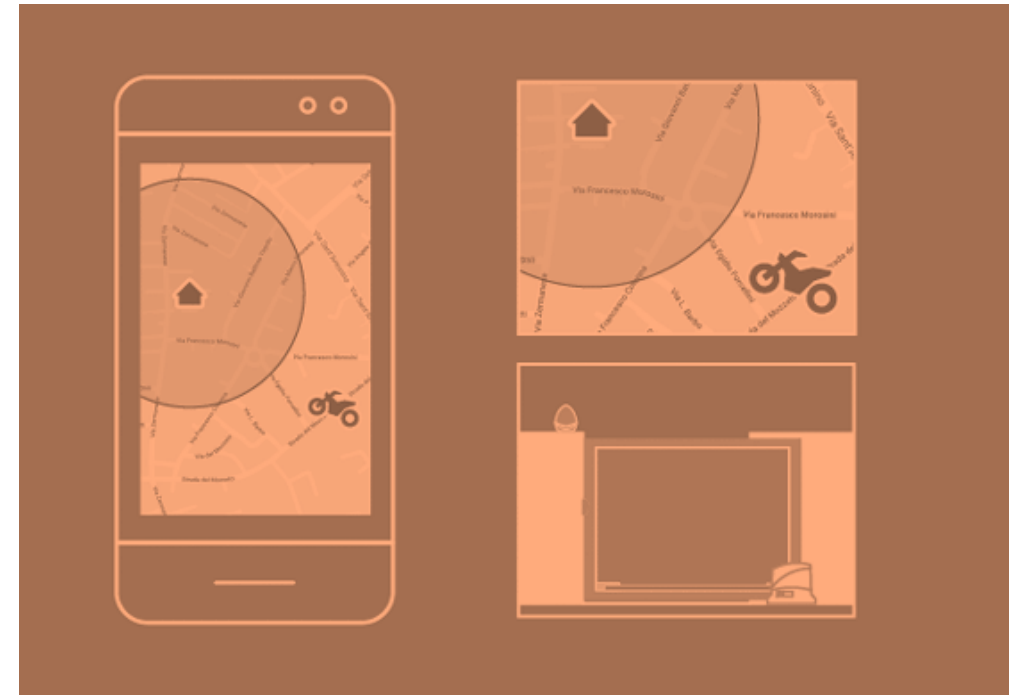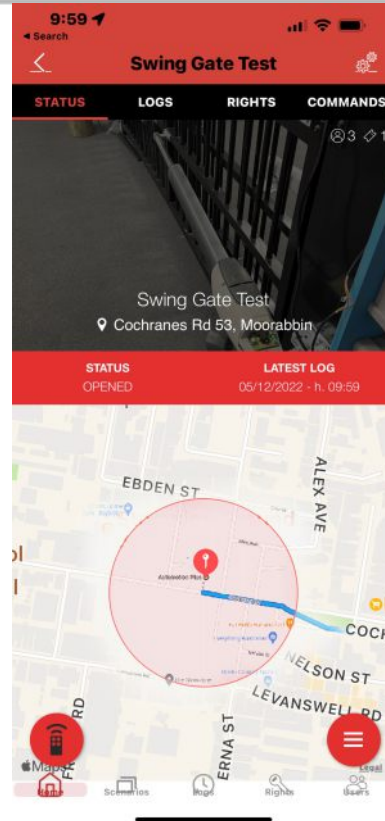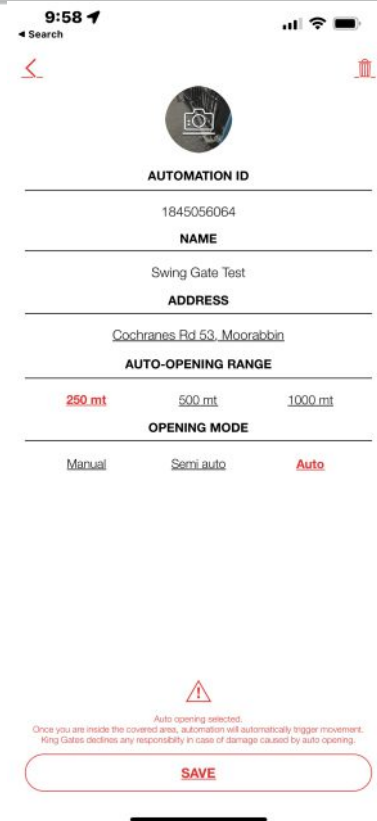




APC INFINITY


WiFi Module for Proteous Range

SET UP PROGRAMMED SCENARIOS TO BE RUN ANYTIME YOU WANT

BUILT-IN TIMER

Set new scenarios according to your needs, choosing for each one whether to activate it manually or automatically at a specific time/day

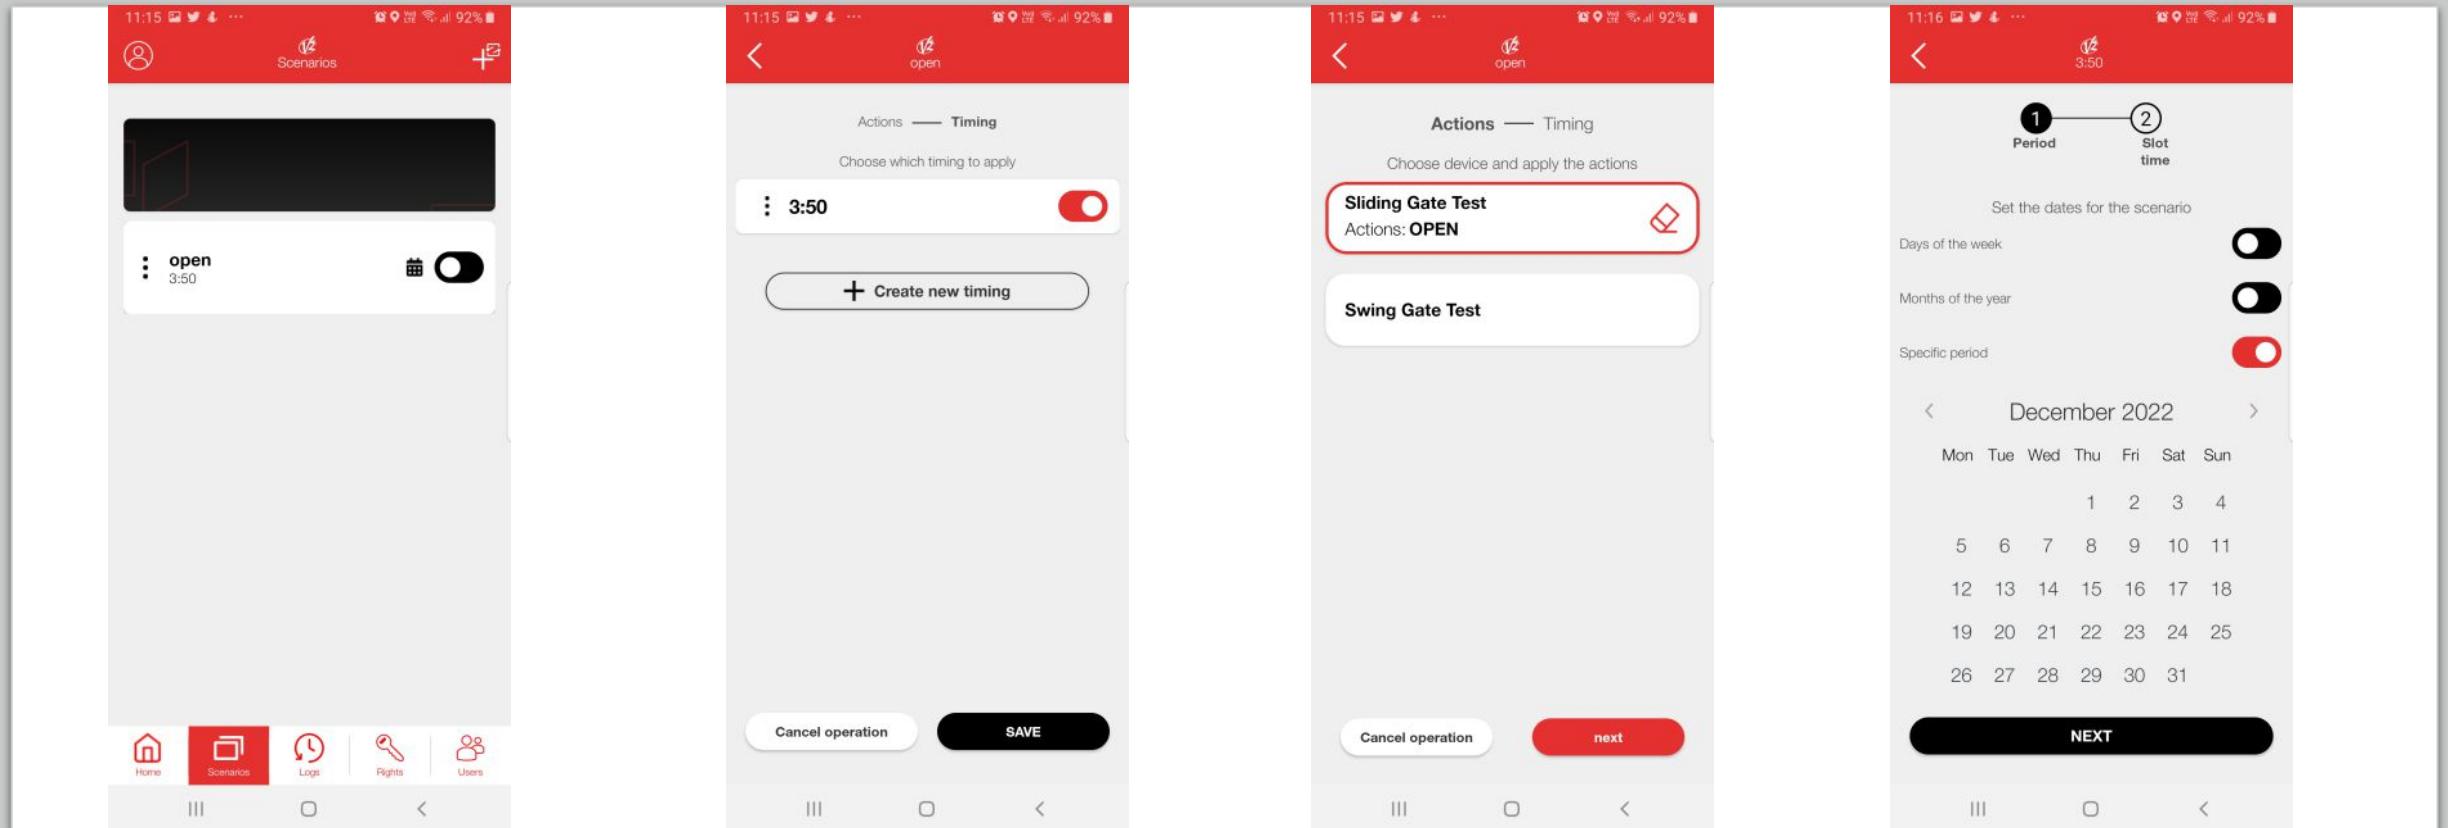

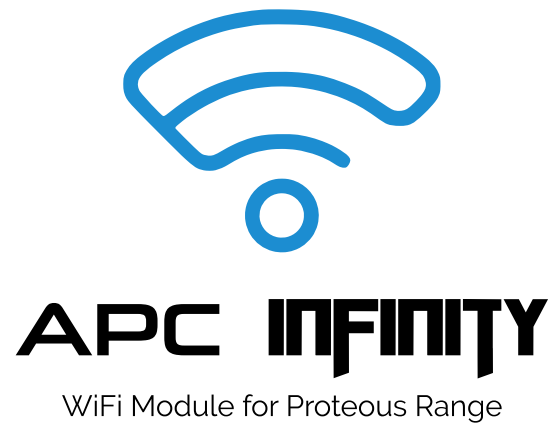

ACCESS MANAGEMENT FROM YOUR SMARTPHONE


APC INFINITY allows you to check all the opening and closing manoeuvres of your gate, anywhere you are.



GATES ROLLUP SHUTTERS OTHER

ADMIN

● **Swing Gate Test**
• **STATUS:** OPENED
05/12/22 - h 11:10

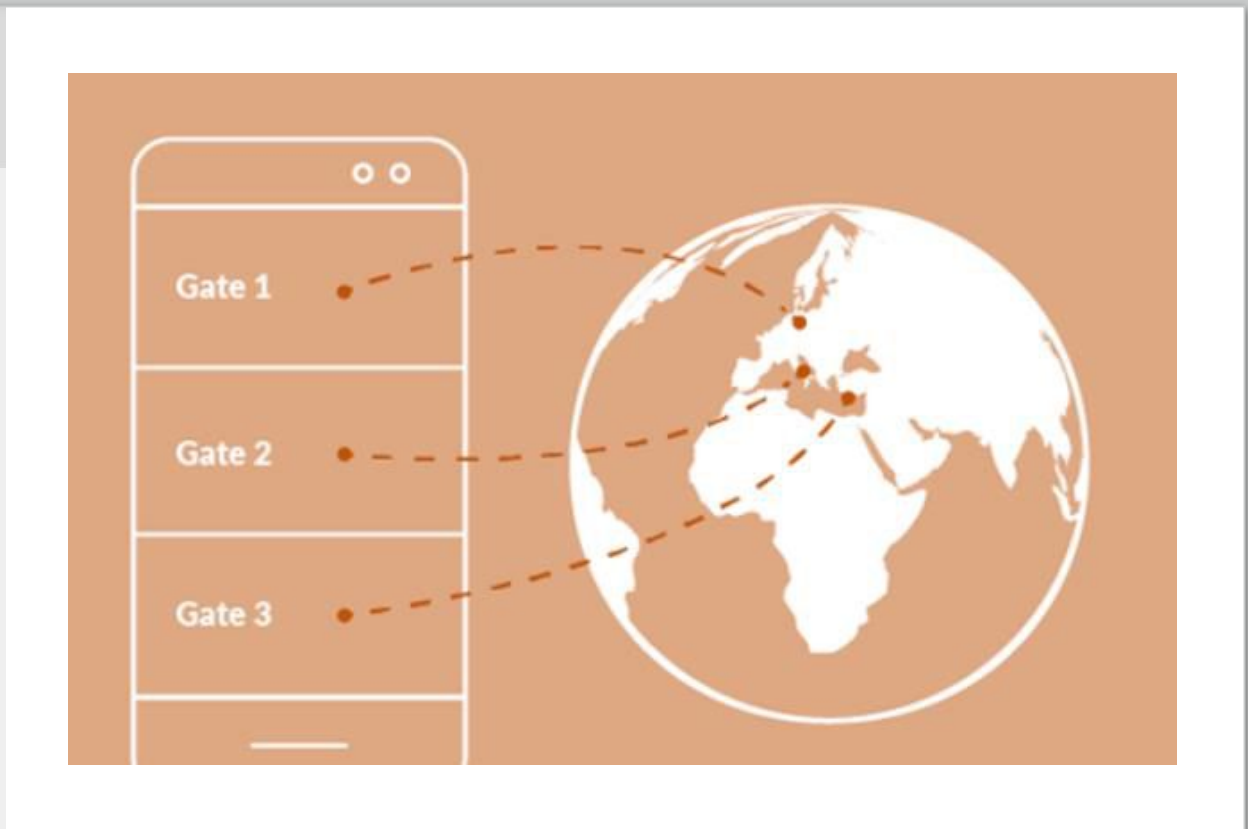





APC INFINITY

WiFi Module for Proteous Range

CHECK AT ANY TIME WHO COMES AND GOES

APC INFINITY lets you manage all access straight from your smartphone by giving specific time slots to who you want when you want. Also from remote.

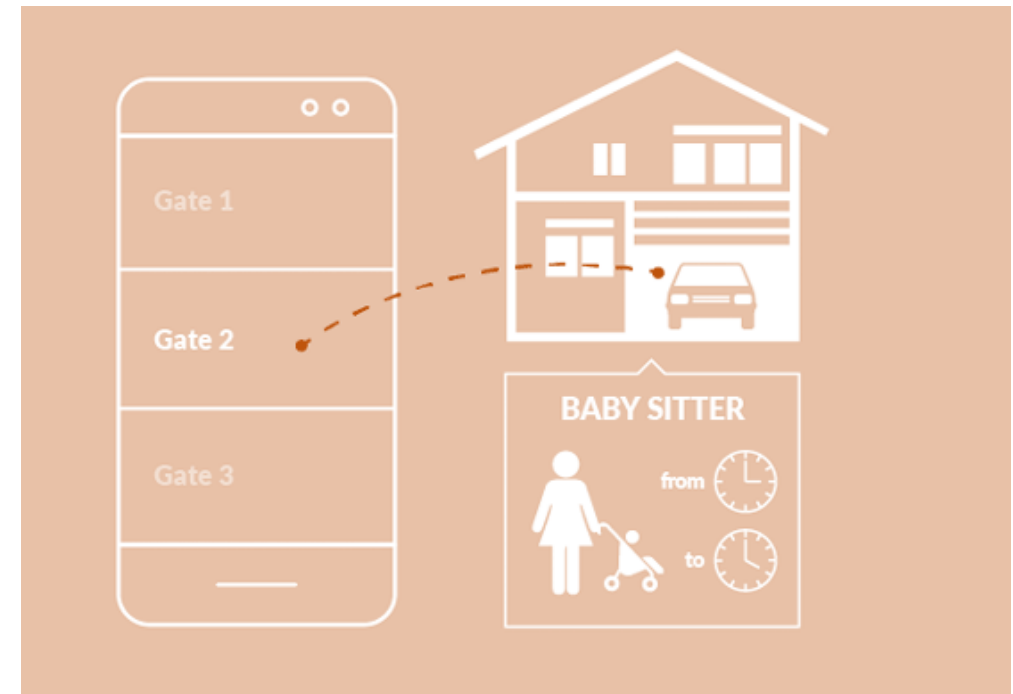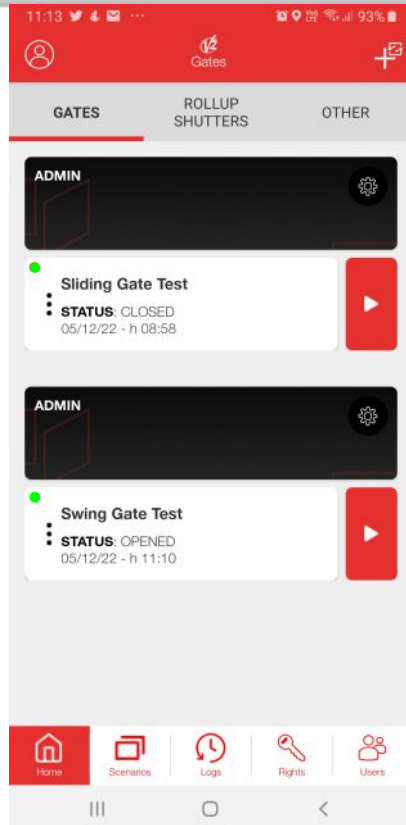





APC INFINITY

WiFi Module for Proteous Range

KEEP EVERYTHING ALWAYS UNDER CONTROL

Even when you are not at home, **APC INFINITY** allows you to check at any time whether your gates are open, closed or moving.

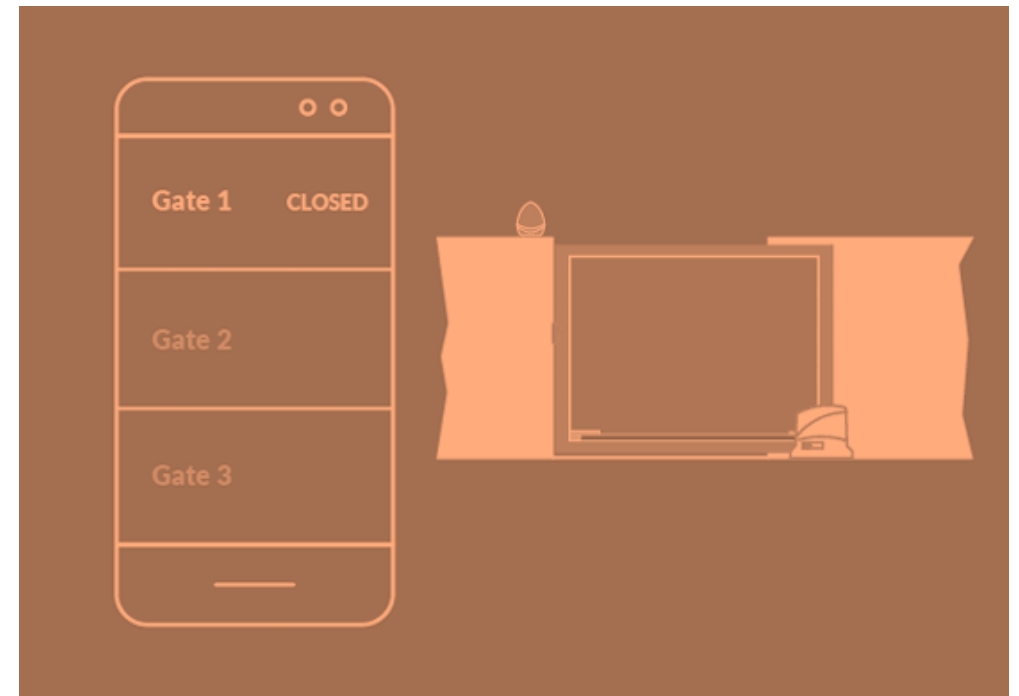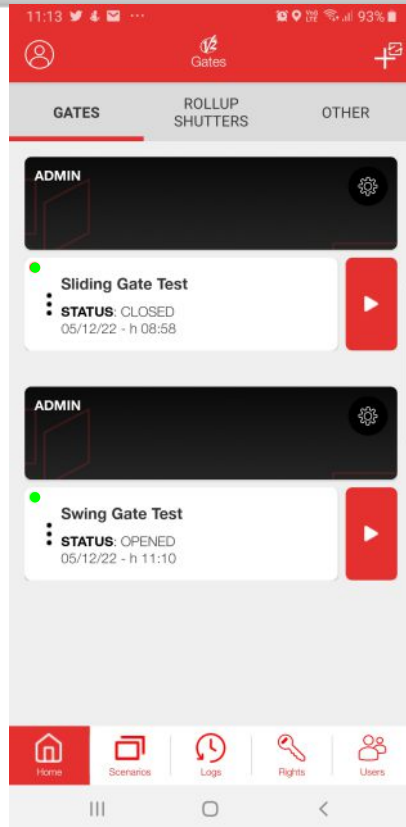



APC INFINITY

WiFi Module for Proteous Range



Remotely manage the automation: you can control the gate, garage, rolling shutters and lights even when you are not at home.



Geolocation: you can decide to receive a notification when you approach the chosen automation or automatically activate it when you are getting close to it (automatic mode).



Remotely check the status of your automation (Did I close my gate, or did I leave it open?) **and the latest movements** (when was the last time it was opened?)



Permissions: grant other users the use of one or more of your automation, but only in the time slot you decide.



Brings together all the home control automation in a single device: lights, garage, gate, rolling shutters and curtains.



Set new scenarios according to your needs, choosing for each one whether to activate it manually or automatically at a specific time/day



APC INFINITY

WiFi Module for Proteous Range

FULL REMOTE CONTROL OF THE AUTOMATION

- Opening
- Closing
- Stopping
- Managing outputs
- Geo fence management of the automation
- Knowing the status of the automation (opened ,closed , % opened, stopped)

FULL ACCESS CONTROL FEATURES

- Defining the users that can have access to the site
- Limiting user access in time (hour, day, week and month)
- Log and record every access of each user
- Adding/Blocking/Deleting users

AUTOMATIC SETUP OF SCENARIOS

- Opening and closing with scenarios
- Each scenario can be performed under a timing (specific hours of the day, daily, monthly, specific day of the year)
- Managing multiple automations with one single command/scenario



Proteous



P450
P500
P1000



APC INFINITY

WiFi Module for Proteous Range



Logico 24

