

# (((APC)))

## Automation Systems

### ML-500 Waterproof Magnetic Lock

ML-500 Connection to CBSW24 control board




Please follow the wiring instruction below to ensure the magnetic lock is receiving the correct voltage, if these instructions are not followed the magnetic lock will be damaged and cannot be replaced by warranty.

1.




- Turn off the power point.
- Turn all power switches on the control board to the OFF state.
- Unplug the battery connection.

2. Set the jumpers as per the illustration below.

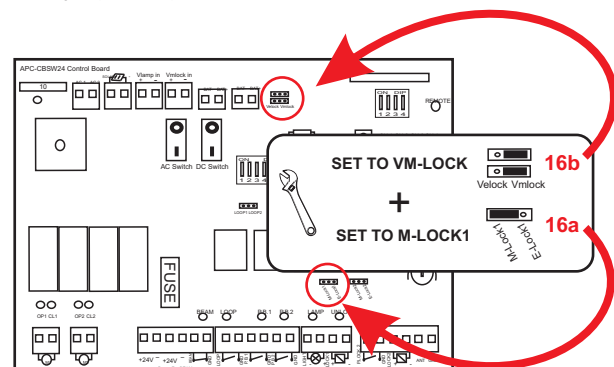

3. Connect the pre-terminated loom into the spare battery terminal on the main board to the VMLOCK in socket.

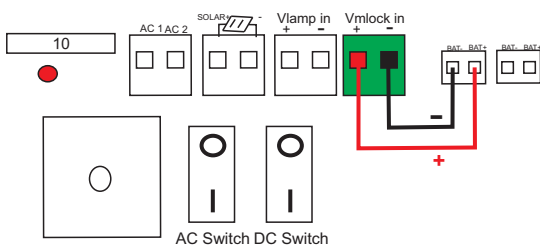

4. Connect the 24V Magnetic lock into the OUTPUT as illustrated.

